




SP - SPACER SET UP TO 7/8" HIGH TECHNICAL SPECIFICATION


Job Name _____	Item # _____
Location _____	
Engineer _____	Contractor _____
PO # _____	Tag _____
Representative _____	

DESCRIPTION


- Spacers are used to set the correct distance between the drain flange and the top of the drain cover. This is the same distance as from the waterproofing to top of the finished flooring material
- Total height of spacer and cover from top of drain flange is 7/8"
- Spacers are required with all PLO models

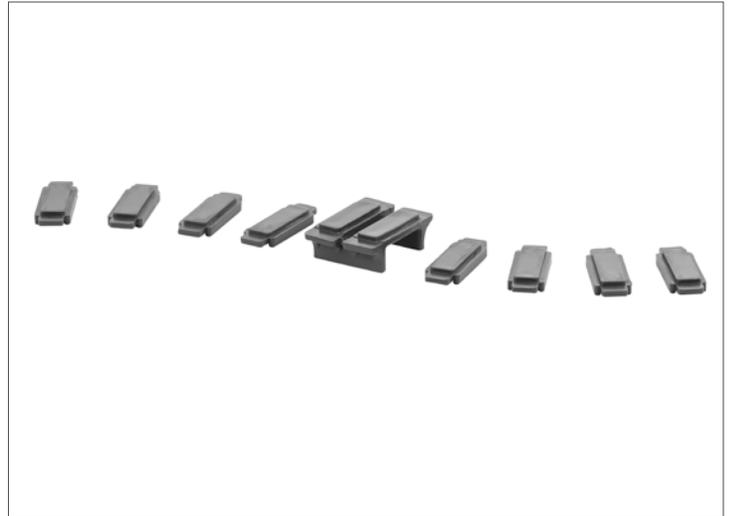



DRAIN ASSEMBLY

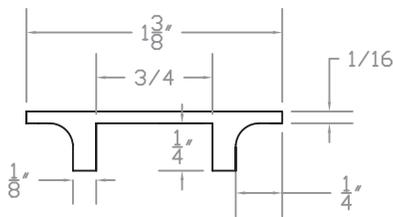


FRONT VIEW BASE

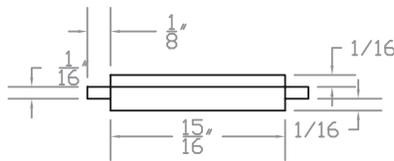


FRONT VIEW EXTENSION

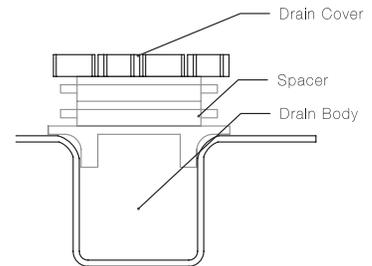


SIDE VIEW BASE




SIDE VIEW EXTENSION



BASE PLUS TWO EXTENSIONS



BASE PLUS FOUR (ALL) EXTENSIONS



BASE



EXTENSION