



TILE IN COVER TECHNICAL SPECIFICATION

DESCRIPTION

Tile In linear drain covers are made of 304 stainless steel and can be used with ShowerLine and ProLine linear drains. They are available in 7 standard lengths and 1 stock finish option (Brushed Stainless Steel). They shall have the ability to be cut on site to fit the exact finished opening and have height adjustability with the use of spacers.

NOTES

QuickDrain recommends that the cover extends the full width of the shower from vertical-to-vertical surface (wall to wall or wall to curb).

Do not grout or caulk the cover in place (cover must remain removable for maintenance).

For proper care and maintenance, reference the Installation Guide.

APPROVALS AND LISTINGS

Before installing QuickDrain USA system, check with your local building department/plumbing inspector to ensure compliance with the local building codes. QuickDrain USA LLC is not responsible for any conflicts with local building codes. QuickDrain USA LLC is not responsible for improper installation of any part of the assembly or the waterproofing membrane. Dimensions are subject to manufacturer's tolerance and can change without notice.




NOTE: The tile-in cover must be installed prior to the floor tile/stone. The top of the cover is critical for determining final floor elevation.

Before installing finished section of tile into the QuickDrain tile-in cover: Cut tile-in cover to desired length, install the base spacer on the underside of the cover, cut your tile to desired width/length and then dry fit to confirm accuracy. Place cover into trough, remove tile and clean surface before installing transition tape, place your finished section of tile into the tile-in cover. Using modified or rapid set thinset is recommended for setting the tile/stone .

Job Name _____	Item # _____
Location _____	
Engineer _____	Contractor _____
PO # _____	Tag _____
Representative _____	



Drain Assembly

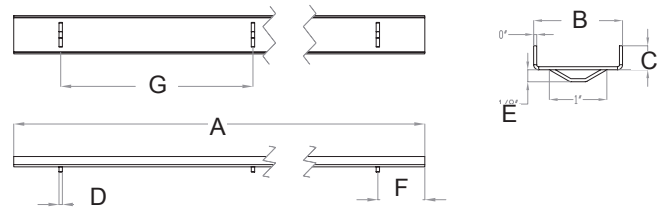

DIMENSIONS

[A]:	Length	18-72"	[E]:	Spacer Slot Depth	1/8"
[B]:	Width	1-3/8"	[F]:	Spacer Slot to End	1-3/4"
[C]:	Depth	3/8"	[G]:	Distance Between Spacer Slots	7-1/8"
[D]:	Spacer Slot Width	1/8"			

TILE IN COVERS

✓	Length	Finish	Item No	COMPATIBLE DRAIN BODY FOR COVER	
				Compatible ShowerLine Drain Body	Compatible ProLine Drain Body
	18"	BRUSHED STAINLESS STEEL	TILEIN18	-	PLD18S1
	32"	BRUSHED STAINLESS STEEL	TILEIN32	PVC2430D20, PVC2430D15, PVC2430D20-SWO, PVC2430D15-SWO, PVC3240D15	PLD26, PLD27.5
	40"	BRUSHED STAINLESS STEEL	TILEIN40	PVC3240D	PLD30, PLD33
	48"	BRUSHED STAINLESS STEEL	TILEIN48	PVC4048D	PLD36, PLD40, PLD44
	56"	BRUSHED STAINLESS STEEL	TILEIN56	PVC4856D	PLD46, PLD48
	64"	BRUSHED STAINLESS STEEL	TILEIN64	PVC5664D20	PLD52, PLD57
	72"	BRUSHED STAINLESS STEEL	TILEIN72	PVC6472D20	PLD63, PLD68

*Compatible with standard (-N) and hot mop (-HM or -HMCI) versions in all sizes except 18".

Access BIM/Revit content through <https://www.lrbrands.com/technical/bim-revit/>